English

Français

Español

Deutsch

Italiano

日本語

SANYO

PRESENTATION REMOTE CONTROL

MODEL POA-RCKIT02

Operating Instruction

**Federal Communication Commission Notice**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures :

– Reorient or relocate the receiving antenna.
– Increase the separation between the equipment and receiver.
– Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
– Consult the dealer or an experienced radio/TV technician for help.

Use of shielded cable is required to comply with class B limits in Subpart B of Part 15 of FCC Rules.

Do not make any changes or modifications to the equipment unless otherwise specified in the instructions.
If such changes or modifications should be made, you could be required to stop operation of the equipment.

Model Number	: POA-RCKIT02
Trade Name	: Sanyo
Responsible party	: SANYO FISHER COMPANY
Address	: 21605 Plummer Street, Chatsworth, California 91311
Telephone No.	: (818)998-7322

FC Tested To Comply
With FCC Standards

FOR HOME OR OFFICE USE

Voor de klanten in Nederland

Bij dit product zijn batterijen geleverd.
Wanneer deze leeg zijn, moet u ze niet weggooien maar inleveren als KCA.

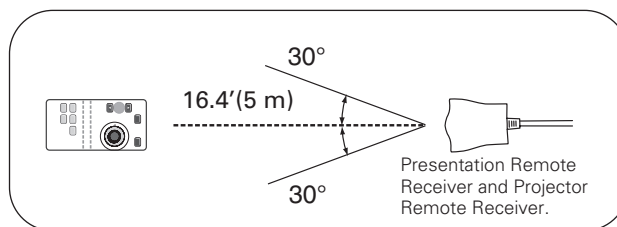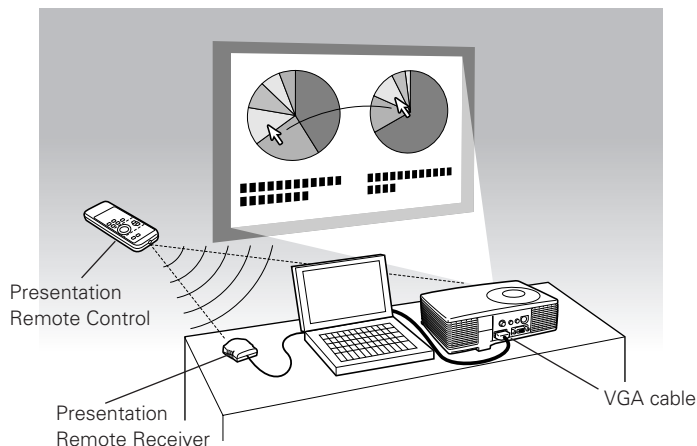CE The CE Mark is a Directive conformity
mark of the European Community (EC).

Installation

. . . .

1 Connect the computer's monitor output terminal to the projector's input terminal with the VGA cable.

2 Connect the Presentation Remote Receiver to the USB port of your computer.

3 Install the batteries into the Remote Control with following the instruction below.

*Note :* *Read carefully the battery precautions in the projector owner's manual.*

Note :
– *The Presentation Remote Receiver can only be connected with a standard USB port.*
– *Some computer settings may have to be changed in order for the mouse function to be used. Refer to your computer's owner's manual for details.*
– *When switching the remote control code of the projector and the remote control, that of the presentation remote control also needs to be switched. Press and hold both the FREEZE and P-TIMER buttons together for 10 seconds or more to switch the code. (For detail, refer to the projector owner's manual.)*

Presentation Remote Control

Presentation Remote Receiver

VGA cable

30°

16.4′(5 m)

Presentation Remote Receiver and Projector Remote Receiver.

30°

Remote Control Battery Installation

. . . .

1 Remove the battery compartment lid.

2 Slide the batteries into the compartment.

Two AAA size batteries
For correct polarity (+ and –), be sure battery terminals are in contact with pins in compartment.
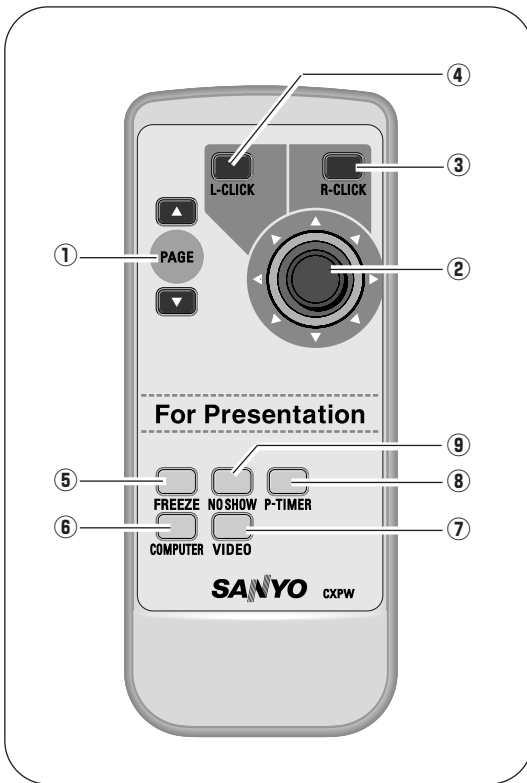
3 Replace the compartment lid.

To insure safe operation, please observe the following precautions :
● Use (2) AAA, SUM-4 or LR03 type alkaline batteries.
● Replace two batteries at the same time.
● Do not use a new battery with a used battery.
● Avoid contact with water or liquid.
● Do not expose the remote control to moisture, or heat.
● Do not drop the remote control.
● If a battery has leaked on remote control, carefully wipe case clean and install new batteries.
● Risk of explosion if battery is replaced by an incorrect type.
● Dispose of used batteries according to the instructions.

Name and Function of Each Button

Presentation Remote Control performs the function of a wireless mouse to control the mouse cursor on the computer.   For convenience while giving presentations, some buttons controlling the projector are also provided.

For computer
Aim the remote control at the Presentation Remote receiver.

① **PAGE ▲▼ buttons**
Scroll back and forth pages on the screen when giving presentations.

② **Cursor button**
Act as the cursor on a computer mouse.

③ **R-CLICK button**
 Act as the right button on a computer mouse.

④ **L-CLICK button**
Act as the left button on a computer mouse.
To drag a selected item, press and hold the L-CLICK button and move the cursor with the Cursor button.

For projector
Aim the remote control at the IR receiver of the projector.

⑤ **FREEZE button**
Freeze the picture.

⑥ **COMPUTER button**
Select COMPUTER input source.

⑦ **VIDEO button**
Select VIDEO input source.

⑧ **P-TIMER button**
Operate the P-timer function.

⑨ **NO SHOW button**
Temporarily turn off the image on the screen.

Note : For detailed operation, refer to the projector owner's manual.

Specifications

Remote Control Unit

Power Source	AAA, SUM-04 or LR03 type x 2
Operating Range	16.4' (5m) / ±30˚
Dimensions	2.0"(W) x 0.91"(H) x 4.8"(D) (51.5mm x 23.2mm x 123mm)
Net Weight	2.54 oz (72 g) (including batteries)

Remote Control Receiver

Transmission Signals	Infrared
Compatible Computers	Windows • Windows 98 / 2000/ Me / XP ✽ Compatible with only full versions of Windows. (Upgraded version cannot be used.) Macintosh • Mac OS 9.1 or later.
Connector	USB Type B
Net Weight	1.6oz (45g)
Cable Length	3.3" (1m)